

Lupo[®] S-10

The perfect label dispenser for your assembly line or packaging belt

MAIN PROPERTIES

Construction left or right side

Labeling in continuous operation with roller or brush


Easy and comfortable handling

Flexibly adjustable

Optional equipment:

- Visual missing label control
- Mobile floor stand
- Add-on modules for
 - * external systems
 - * booklet-labels
 - * wrap around labeling
 - * application with stamp

Due to the robust construction and easy handling, this label dispenser is universally usable. The positioning of the height and width can easily be adjusted. After the label roll is inserted with a easy manual handle, the labels are applied to the front dispenser edge. The labels are exactly applied to your products or packaging

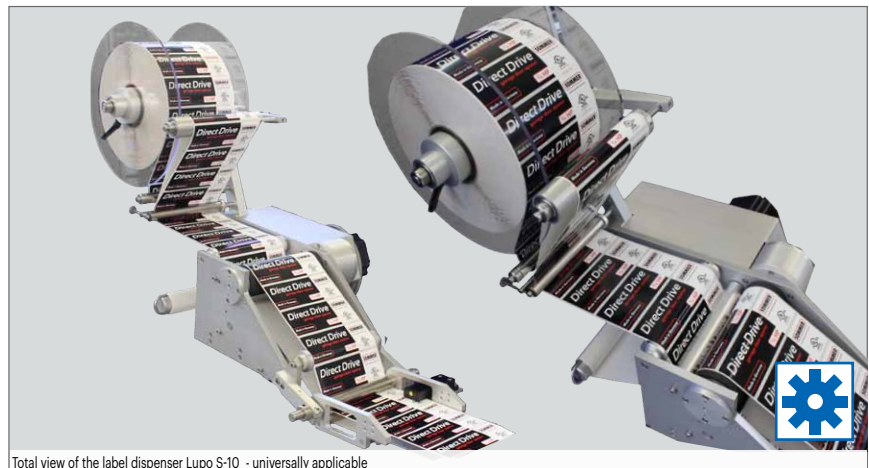

Characteristics	Lupo [®] S-10
Label dimensions	Basic version transmitting width 80 - 220 mm; other widths available on request
Label precision	Up to $\pm 1,0$ mm
Label scan	Standard scan with light barrier Optional scanning with other sensors when using transparent labels
Application performance	Max. 50 m/min, depending on label height
Label roll	Winding: inner or outer winding Diameter - Ø approx. 300 mm / inner or outer winding; other sizes on request
Control system	Control type is selected depending on the application: SIEMENS, B&R, KLÖCKNER and others
Power supply	110 V AC – 240 V AC, 50 Hz – 60 Hz
Power train	500 Watt
Weight	Approx. 12 kg
Dimensions	Basic version: 850 mm (length) x 580 mm (height) x 350 mm (width)