

Lupo[®] THS-10

Application of extensive labels - without air pockets

MAIN PROPERTIES

Labeling without air pockets


High performance through a transport belt in a continuous labeling

Comfortable use with touch screen construction left/right

Dispensing of transparent labels or adhesive tapes

Modular design: flexible extension/integration possibilities


Optional: integration of a printing unit possible

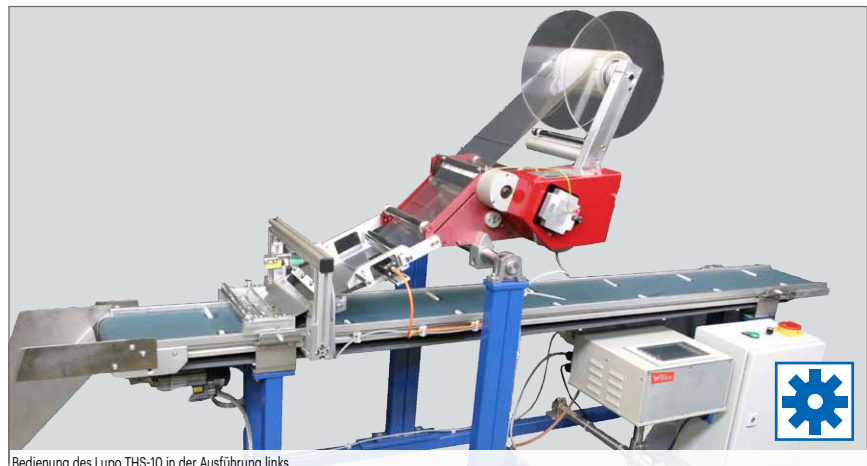


Bedienung des Lupo THS-10 in der Ausführung links



The direct way to zum Lupo[®] THS-10

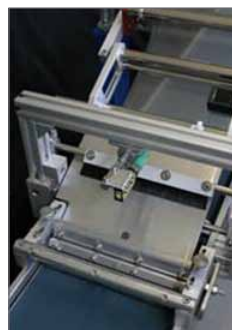

Synchronisierung Etikett und Produkt

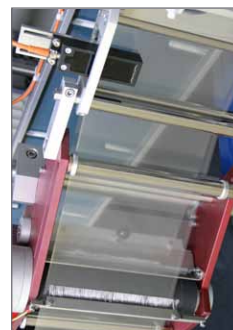

Sensorik für transparentes Etikett



Exakte Bahnführung

Characteristics	Lupo [®] THS-10
Label dimensions	Width: 20 - 220 mm (0.8 inch – 8.6 inch); special sizes available upon request Height: min. 20 mm (0.8 inch)
Label roll	Winding: in- or outside winding Inner core - Ø: 76 mm (3 inch); optional also other sizes Diameter - Ø: max. 280 mm (11 inch); optional larger
Dispensing speed	Up to 20 m/min
Positioning accuracy	Up to ± 0,5 mm (± 0.02 inch)
Control system	WS4000, comfortable operation on the touch screen Memory capacity of up to 100 different label sizes
I/O-Ports	PROFIBUS DP / Ethernet / I/O 5 V – 24 V / serial / optional USB
Synchronization	Abtastung der Bandgeschwindigkeit
Label type	Flow path dispensing
Power supply	110 V AC – 240 V AC, 50 Hz – 60 Hz
Dimensions	1200 mm (width) x 2000 mm (length) x 1700 mm (height)